


Zebec conducts DP capability studies for vessel with a given thruster system to examine the operability environmental limits. This analysis will help vessel owners to ensure that DP operation is safe and efficient.

**The typical DP capability studies include:**

- Analysis for vessel only with tunnel or azimuth or combinations of both including the main propeller capacity
- Determination of the maximum environment in which the vessel can withstand, when all thrusters are operations under maximum efficiency / failure of one or more thrusters / Low efficiency operations
- Determination of most economical thruster capacity and configuration for given environmental condition.
- Determination of wind/current loading on the vessel based on industry accepted IMCA, DNV wind current coefficients and formulations.
- Determination of wave drift loading by using Bureau Veritas hydrodynamic (Hydrostar) software
- Determination of critical wind speed, wave height and current speed at the thrusters failure for each heading for given thrusters configuration and capacity
- Determination of environmental loading for each wind steps for each heading

**In house program:**

A macro program is developed to calculate the thruster system critical loading distribution for a particular direction of wave, current and wind loading to the vessel. The program will generate the limiting curve of the wind for all direction of wave, current and wind attack in which the vessel can be dynamically positioned with the thruster system arrangement and capacities specified. In addition, this program has the capability to compute the critical wind curve with one or multiple thrusters switched off and with change of loading bearing efficiency for each active thruster. The in house program is validated with available model testing.

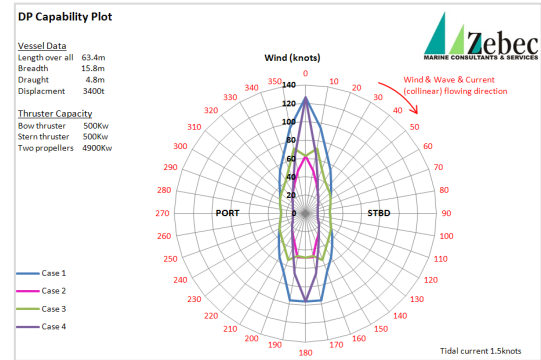


THRUSTER SELECTION		
Thrusters	Active/Inactive	Type
Bow Thruster 1	ON	TUNNEL
Bow Thruster 2	OFF	TUNNEL
Stern Thruster 1	ON	TUNNEL
Stern Thruster 2	OFF	AZIMUTH
Main Propeller 1	ON	
Main Propeller 2	ON	

Run For Table Output of Thruster Capacity/Position

CAPACITY & POSITION OF THE TRHUSTERS (click above tab for input)					
Sr. No	Thruster	Longi distance X from center of rotation (m)	Transverse distance Y from center of roation (m)	Maximum positive rotation thrust capacity (KN)	Maximum negative rotation thrust capacity (KN)
1	Bow Thruster 1	23.3	0	75	-75
2	Stern Thruster 1	-22.8	0	75	-75
3	Main Propeller 1	-26.5	-5.8	281	-196
4	Main Propeller 2	-26.5	5.8	281	-196

Iteration Nearest To:  KN  
 Number of directions:   
 Environment wind conditions per direction:

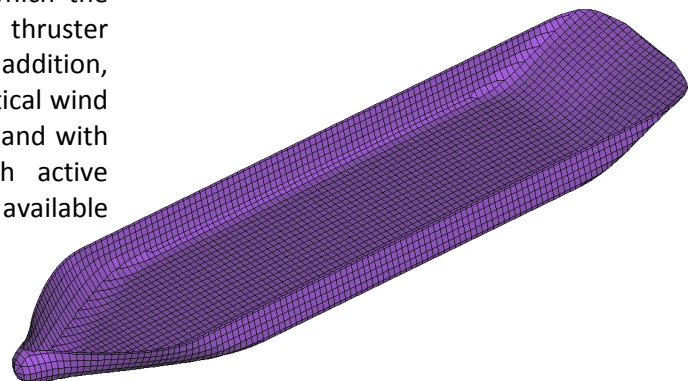

Offices at: India (Mumbai, Goa, Cochin, Kandla) & Singapore  
 Contact Us: At Mumbai, India: +91-22-30205000 / At Singapore: +65-62253579  
 Email: zebec@zebecmarine.com | www.zebecmarine.com